

INSTRUCTION

08-2017



Ledona

901520.002.1



IP 20 IK03



220 - 240 V / 0 Hz, 50 - 60 Hz




3 x 1,5 mm²



1,50

mm²

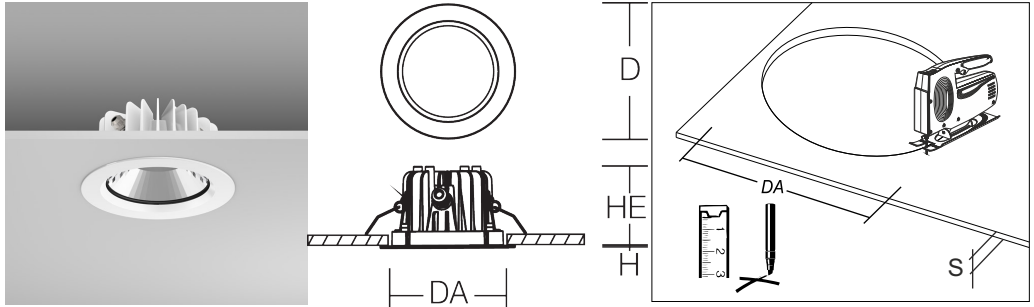

901520.002.1	D 180, H 3	DA 160, HE 89, S 1-20 mm	LED	28 W	1,13 kg
Φ	EEK _{LED}	EEK	CRI	CCT	
2850 lm	A+	A+	85	4000K	
11	17	18	28	24,7 A	











! Die Leuchte darf nur mit ihren vollständigen Schutzabdeckungen betrieben werden.
The luminaire must be used with its complete protective covers only.

EN 12464

EN 12464


Wartungsplan/
Maintenance schedule

RZB
Rudolf Zimmermann,
Bamberg GmbH
 Rheinstraße 16
 D-96052 Bamberg
 Deutschland
 Telefon +49 951/79 09-0
 Telefax +49 951/79 09-198
 www.rzb.de
 info@rzb-leuchten.de

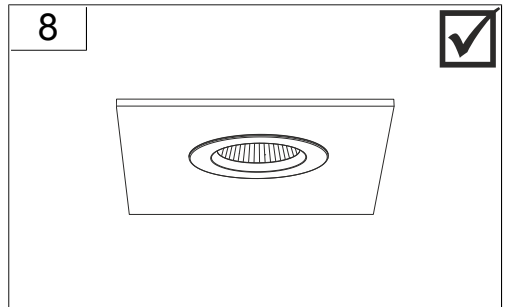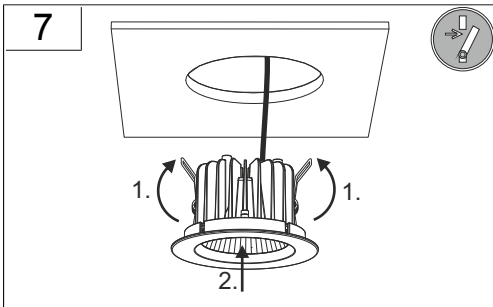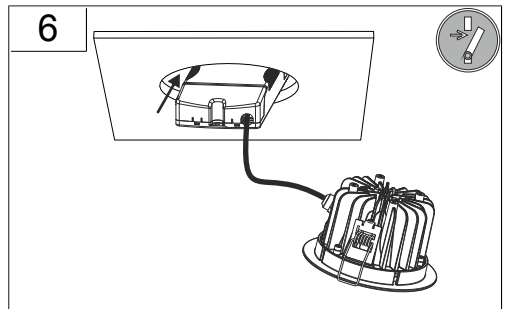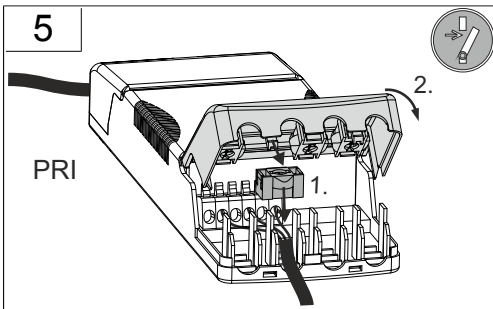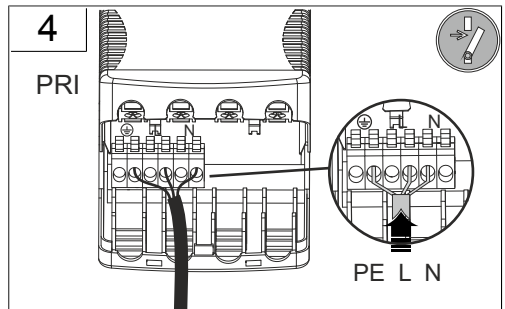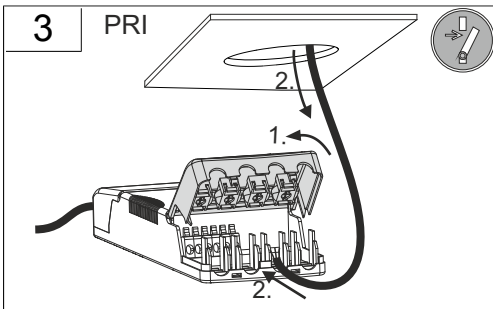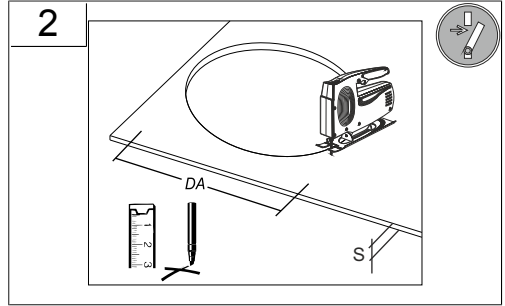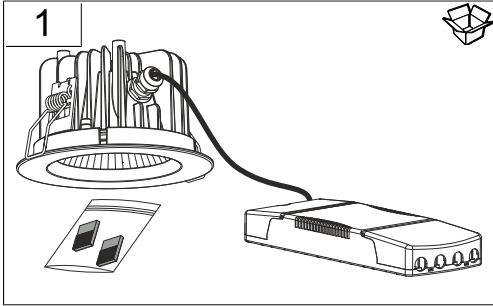




min. L 500 x B 500 x HE (mm)



Leuchte ist nicht geeignet zur Abdeckung
mit Isoliermaterial!
Luminaire is not suitable for covering
with insulating material!

optional für Metall-, Holz- oder Gipskarton-Decken
optional for metal, timber or drywall ceilings

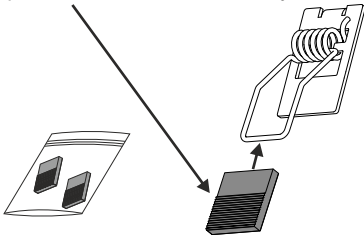

Instruction:



08-2017

