



INSTRUCTION

Calido
742130.002



RZB
LIGHTING

~ 220 - 240 V 50/60 Hz IP 20

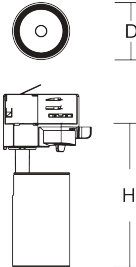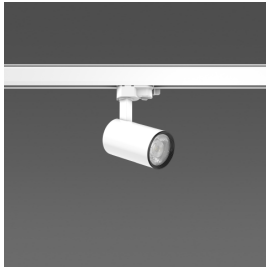

742130.002

D 65, H 164

490 g



LED

1 x 21,5 W

25 W

1950 lm

CCT

CRI

EEK


EEK

3000 K

80

A++

A++



6,4 A / 16 µs

7

12

15

25



DIN EN 61340-5-1



! 0,3 m

Der Abstand zu beleuchteten Gegenständen muss min. 0,3 m betragen!
The distance to the direct illuminated objects must be at least 0.3 m!

EN 12464
EN 13201



<100%









100%


EN 12464



H₂O



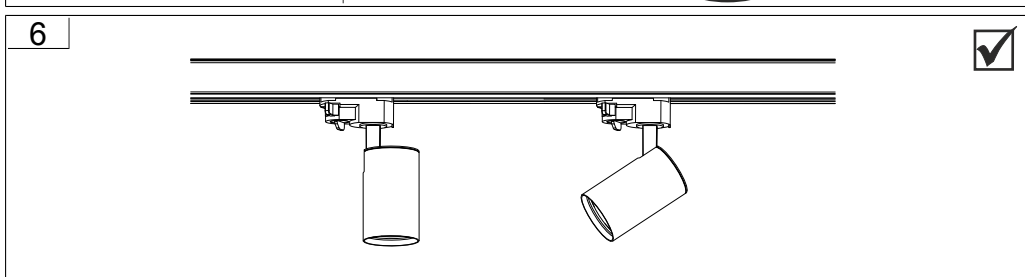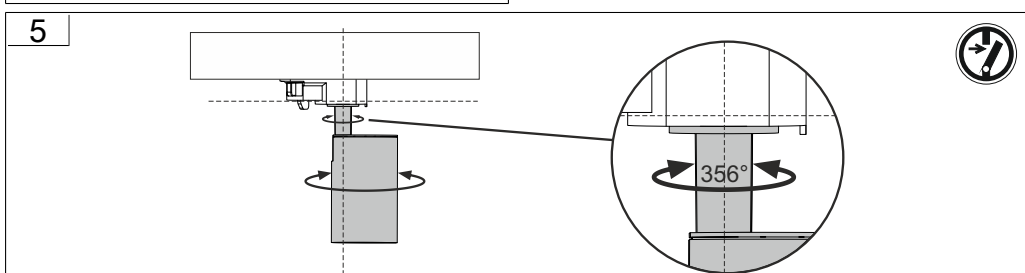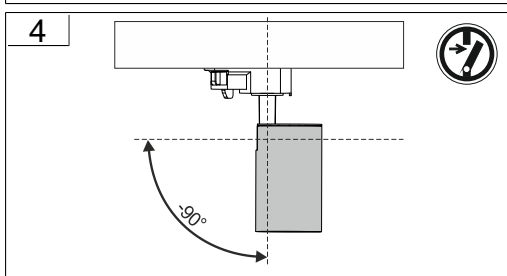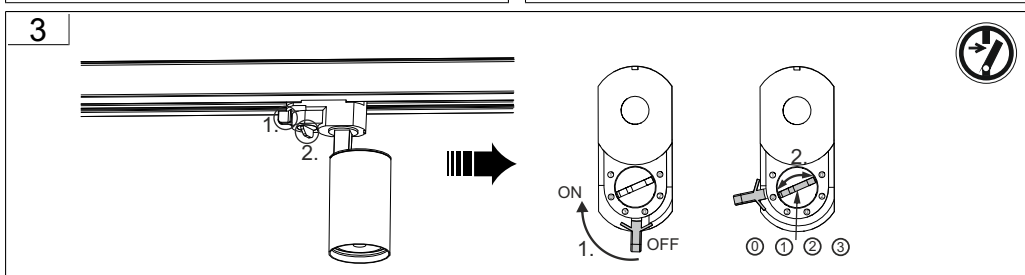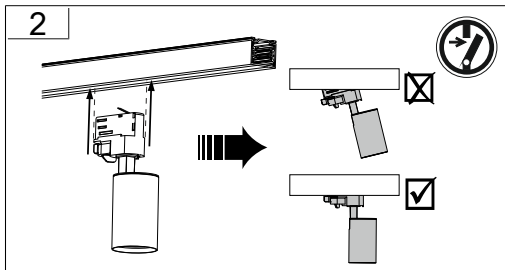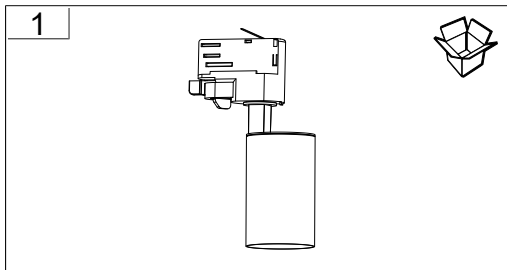



Clickbeam

	I_n	Power factor / Leistungsfaktor
742129.*	58 mA	> 0,9
742130.*	116 mA	> 0,9
742131.*	179 mA	> 0,9
742132.*	237 mA	> 0,9

Only to be installed outside
arms reach. /

Nur zur Installation außerhalb
des Handbereichs vorgesehen.

Die in dieser Leuchte enthaltene Lichtquelle darf nur vom Hersteller oder seinem Kundendienst oder einer ähnlich qualifizierten Person ersetzt werden. /

The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



	982544.003	D 55, H 4,	2 g
--	------------	------------	-----